LEVEL 2 ROAD, TYPE A OR TYPE B WORKS DESIGN PARAMETERS	
SPEED LIMIT	50km/h
SIGN VISIBILITY (m)	50
NUMBER OF SIGNS	3
CUMULATIVE DISTANCE(m)	75
DISTANCE BETWEEN ADVANCE SIGNS(m)	25
TAPER AT LANE(m)	1 IN 15
TAPER AT HARD SHOULDER(m)	1 IN 10
LAMP SPACING AT TAPER(m)	6
LONGITUDINAL LAMP SPACING(m)	12
CONE SPACING AT TAPERS(m)	3
LONGITUDINAL CONE SPACING(m)	6
CONE HEIGHT(mm)	750
LONGITUDINAL SAFETY ZONE(m)	25
LATERAL SAFETY ZONE(m)	0 5
MINIMUM LANE WIDTH(m)	3 0

NOTES

1) DESIGNED IN ACCORDANCE WITH THE GUIDELINES SET OUT IN CHAPTER 8 OF THE TRAFFIC SIGNS MANUAL (NOVEMBER 2010), TABLE 8 3 1

2) ALL WORKS ARE TO BE CARRIED OUT IN ACCORDANCE WITH LOCAL AUTHORITY REQUIREMENTS AND ARE TO BE INCLUDED IN THE SITE-SPECIFIC SAFETY & HEALTH PLAN.

3) INSTALLATION, MODIFICATION, AND REMOVAL OF TEMPORARY TRAFFIC MANAGEMENT MEASURES IS TO BE SUPERVISED BY A TEMPORARY TRAFFIC MANAGEMENT SUPERVISOR (TTMS) WHO HOLDS A VALID SIGNING, LIGHTING AND GUARDING AT ROAD WORKS CARD (CSCS)

4) CONTRACTOR IS TO CARRY OUT A SITE RISK ASSESSMENT PRIOR TO THE INSTALLATION OF ANY TRAFFIC MANAGEMENT PLAN TO ENSURE THAT CONDITIONS REFLECT THOSE CONSIDERED FOR DESIGN POST SUBMISSION

REV	NOTE	DATE	BY	CHK'D	APP'D

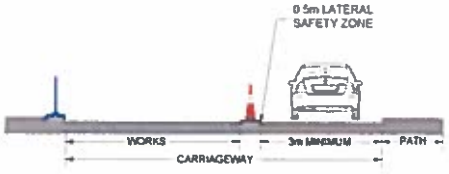

SECTION A-A

TRAFFIC MANAGEMENT NOTES

GENERAL NOTES
1 PEDESTRIAN ROUTES MUST BE MAINTAINED AT ALL TIMES, ON BOTH SIDES OF THE STREET DURING THE WORKS
2 ALL PRIVATE DWELLING AND BUSINESS ACCESSES AND ANY OTHER WAYS AFFECTED BY THE WORKS MUST BE MAINTAINED AT ALL TIMES.
3 ACCESSES MUST NOT BE BLOCKED UNTIL ALTERNATIVE ACCESSES HAVE BEEN PROVIDED
4 THE WORKS AREA MUST BE FENCED OFF WITH HERAS FENCING (OR SIMILAR APPROVED)
5 TEMPORARY PEDESTRIAN ROUTES SHOULD BE A MINIMUM OF 1 5M WIDE
6 ROAD DANGER LAMPS SHOULD BE PROVIDED DURING DARKNESS
7 ALL SIGNS TO BE REFLECTIVE.
8 ALL TRAFFIC CONES SHALL CONFORM TO BS EN 13422 2004 AND HAVE A REFLECTIVE SLEEVE.
9 PEDESTRIAN RAMP OF SUITABLE SURFACE, GRADIENT & KERBING SHOULD BE PROVIDED WHERE NECESSARY FOR DISABLED, SCOOTER AND CHILD PRAM ACCESS.
10. ALL TRAFFIC MANAGEMENT PLANS ARE DESIGNED IN ACCORDANCE WITH 'DEPARTMENT OF TRANSPORT - CHAPTER 8, TEMPORARY TRAFFIC MEASURES AND SIGNS FOR ROADWORKS AND TABLE 8 3 1 DESIGN PARAMETERS FOR LEVEL 2 (SINGLE CARRIAGEWAY 50 KM/H)
11 INSTALLATION, OPERATION, MAINTENANCE AND REMOVAL OF TRAFFIC MANAGEMENT MEASURES MUST BE CARRIED OUT IN ACCORDANCE WITH TRAFFIC SIGNS MANUAL CHAPTER 8 - TEMPORARY TRAFFIC MEASURES AND SIGNS FOR ROADWORKS.
12. EMERGENCY SERVICES AND DELIVERIES TO BE CATERED FOR AT ALL TIMES